APPLICATION SOFTWARE USE GUIDE

WATER PURIFIER

TWP-W2529TMY(W)
TWP-W2529TMY(M)



TOSHIBA

CONTENTS

The following functions can be achieved---------- 1
Safety precautions---------- 1
Articles required for using the application software---------- 1
Wireless LAN requirements---------- 2
From the installation of the application software to the connection with the water purifier---------- 3
Application software operation interface---------- 5
Under this circumstance---------- 8
Specification of wireless LAN---------- 9
Copyright, etc. ---------- 9
Consultation about using the operation method or in trouble---------- 9

- Thank you very much for purchasing Toshiba direct drinking water Purifier.
- In order to use this product safely and correctly, please read this Manual carefully before using it and fully understand the contents.
- After reading this Manual, please keep it where the user can see it at any time.
- The menu of the application software used in this Manual may be changed without notice.

The following functions can be achieved

● Remotely check the status of the water purifier

- The water consumption of the cumulative daily, weekly, monthly and yearly through the APP.
- The life of filters is about to expire,the APP will remind you with Red/Yellow color.

● Client support function

- Receive push notifications when error occurs.
- Provides common questions, menus, and other information to use the water purifier.

Safety precautions

Please read it carefully

The followings describe the matters that must be observed in order to prevent harm to users or others or property damage. When described in the "Description of marks" are the classification of the degree of hazard and damage that occurs during misuse and operation, and "Description of graphic symbols" are the meaning of different symbols.

Description of marks

⚠ **WARNING** It means "content with the possibility of death or serious injury".

* Severe injuries refer to those which cause sequelae, need hospital cares and long-term sequential treatments, including going blind, getting injured, getting burned (high temperature and low temperature), getting an electric shock, being fractured and being poisoned, etc.

Description of graphic symbols

The text near the graphic indicates operations that must not be performed (prohibited).

The text near the graphic indicates the operation (instruction) that must be performed.

⚠ WARNING

Instruction	Please keep more than 15cm away from people who have embedded pacemakers and efibrillators. The radio waves generated by wireless LAN may have a bad influence on pacemakers, etc. and cause accident.
Prohibited	Do not use it near automatic control equipment such as automatic doors and fire alarms. Do not use it in hospitals or places with electric equipment for medical use. The radio waves generated by the wireless LAN may have a bad influence on the equipment and cause accident.

Articles required for using the application software

☐ Smart phone (Android, iPhone)... it cannot guarantee that the product can work properly if tablet computer is adopted.

☐ Dedicated application software (free)..... It is necessary to check the water purifier with the smartphone.
Installation method (→ Page 3)


☐ Internet environment... Need to sign contract with the Internet line provider.

☐ Wireless LAN router... Connect the water purifier to the Internet line.
* The connection with the water purifier uses the 2.4Ghz/5Ghz frequency band (IEEE802.11a, IEEE802.11b, IEEE802.11g, IEEE802.11n).

【Requirem ents】
- In order to achieve the security countermeasures, make sure to use the device that adopts the suitable encryption method WPA2 or WPA (both TKIP or AES). Recommendation: WPA2 (AES)
- For the wireless LAN router settings, please refer to the Operation Instructions.

Wireless LAN requirements

- Working frequency band
  Wireless LAN uses the 2.4Ghz/5Ghz frequency band, but it is possible that other wireless devices are also using the same frequency. In order to prevent radio wave interference with other wireless devices, please note the following when using it.
- Specifications of the wireless used by this product

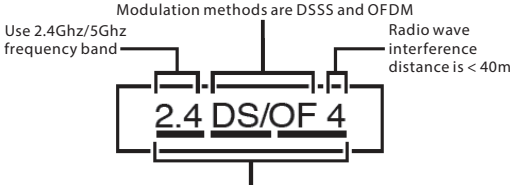

This means that the entire frequency band from 2.4GHz to 2.4835GHz and 5.15GHz to 5.825GHz can be used, and the use of the frequency band of the mobile identification device can be avoided.

Precautions for the use of wireless LAN device

In the frequency band used by this equipment, in addition to industrial, scientific and medical equipment such as microwave ovens, there are also radio stations in the area for identification of moving objects used in factory production lines (licensed radio stations) and specific low-power radio stations (radio stations that do not require license) and amateur radio stations (radio stations hat require license) are also in use.

1. Before using this device, please make sure that there isn't any radio station in the a rea for identification of moving objects, specific low-power radio stations, and wireless radio stations are in use near the accessory.
2. In the event that harmful radio wave interference occurs from the radio station in the area where this device is used for identification of moving objects, please change the venue immediately or stop using the radio wave.
3. In addition, if this equipment causes harmful radio wave interference to specific low-power radio stations or amateur radio stations used for mobile identification, please change the equipment immedi ately or stop using radio.

- Equipment certification

  This equipment has built-in wireless device that has obtained engineering design certification based on the radio law, and there is no need to obtain a separate radio station license.
  However, the following actions are prohibited under the radio act.
  - Implement decomposition/remodeling.
  - Eliminate the compliance mark of the built-in wireless device.
- Service life
  Please be aware of the following restrictions during use.

  Our company will not be responsible for any incidental damage caused by the use or inability of wireless LAN in the case of non-compliance with restrictions.
  - Do not connect to a wireless network without permission.
    When an automatic search of the wireless network environment is performed, the wireless network (SSID ※) that does not have access rights may be displayed, and it may be determined as illegal access after connection.
  - Please do not use it in the place that generates magnetic field, static electricity, or radio wave interference.

When used near the following equipment, the communication may be interrupted or the speed may slow down.

- Microwave oven
- Other wireless LAN devices
- Other devices that use 2.4Ghz/5Ghz frequency band radio waves (digital cordless phones, wireless audio equipment, game consoles, personal computer peripherals, etc.)
- Metal objects that easily reflect radio waves, etc.

※It is the name used to identify the specific network in the wireless LAN. Two devices can communicate if the SSID are the same.

【About the SSID of this machine】

- **SSID: toshiba_ed_xxxx**
- **PASSWORD: 12345678**

※ "xxxx" is the fixed serial number of the equipment.

- Security countermeasures
  - Since data is sent and received using radio waves via wireless LAN, there is a risk of nauthorized access. To ensure data security, please take security countermeasures. (→ Page 1)
    If the failure to take safety measures causes any problem, our company will not assume any responsibility.
  - Please set the password of the wireless LAN router to 8 characters or more and 63 characters or less, and it is recommended to change the password regularly.
- About firmware
  - This equipment has the function of connecting to the firmware update server of our company via the Internet and automatically updating its firmware to the latest version. Since wireless communication will be temporarily interrupted during the update process, communication interruption or slowdown may occur.
  - Please do not analyze or modify the firmware.


From the installation of the application software to the connection with the water purifier

1. Download and install the app. Search for: TSmartLife in the mobile application market, or scan the QR code to download and install the APP.


TSmartLife

Download the app & activate product

2. Click on the APP icon to enter the APP.




3.Read and agree on the **Privacy Policy and Software License and User Service Agreement.**




4. Click the button of **Login.**




5. Click the button of **Sign up >.**



6.Enter email and **send verification code**.




7. Select service region and enter verification code. Agree on the **Privacy Policy and Software License and User Service Agreement.** Click the button of **Next**.




8.Set password.Then c lick the button of **Register and login**.




9.Enter the homepage. click the button of **Add device**.




10.Select a device.Choose **Water dispenser and purifier device.**



11.Select model
TWP-W2529TMY(W)
TWP-W2529TMY(M).




12.Choose Wireless Connection interface, enter Wireless Connection password. Click the buttonof **Next.**




13.If you haven't authorized location before, please allow access in the settings the turn on the precise location.Click the button of **Go to setting.**




14.Enter **Setting** page.Click the button of **Location**.




15.Choose **While Using the App**.



16.Return back to the **TSmartLife**.Click the button of **Next**.




17. Long press  for 3 seconds, light flashes.



18.Wait for connecting.




19.Added successfully. Named it as your wish.Then click the button of **Complete**. 	20.Back to the homepage. 

Precautions and troubleshooting for reasons for network failure.

1. When connecting the product to the network, make sure that the mobile phone is as close as possible to the product.
2. According to the App prompt, if your product only supports 2.4GHz Wireless network communication, when selecting the current home Wireless network, please pay attention to selecting the 2.4GHz network.
3. The router Wireless network name is not recommended to contain Chinese or special characters (including punctuation marks, spaces, etc.).
4. It is recommended that the number of connected devices under the same router does not exceed 10 to avoid the influence of unstable signals on the network.
5. If the router or Wireless network name and password are changed, you need to repeat the above process to reconnect to the Internet.
6. As product technology is updated, the content of Toshiba App may be changed, and the actual display guide in TSmartLife shall prevail.

Application software operation interface

1. Enter the home page of the APP control interface, the display is as follows:

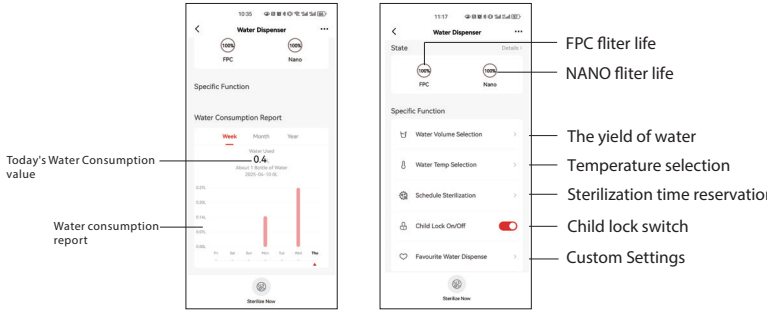

2. The yield of water

On the home page of the APP, click on the quantity of water, there are three stalls to choose, click on any stall, you can select the corresponding amount of water to set water intake.




3. Temperature selection

On the home page of the app, click the water temperature selection to set the water temperature, you can set the water temperature of hot water, click hot water 1 to 3, there is a corresponding hot water temperature choice.



4. Sterilization time reservation


On the home page of the APP, click Sterilization reservation, you can choose different water temperature and quantity, you can set up to 5 items.

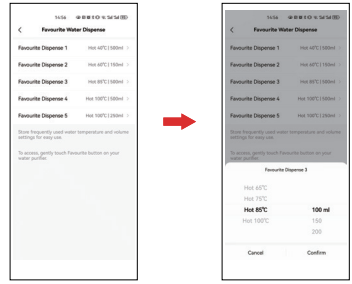

5. On the APP homepage interface, click the corresponding filter element icon to enter the corresponding filter element life display interface:



6. APP control interface homepage, click the button of "•••" , enter other function display interface:



Under this circumstance

Continued...

Under this circumstance	Check ・Cause
If the connection fails, please follow the steps on the right to check.	The water purifier has not established a connection with the wireless LAN router. ・Is the SSID of the wireless LAN router is displayed on the selection menu of the wireless LAN router. →Before performing the connection operation with the water purifier, please connect the smartphone to the wireless LAN router. In addition, when acquiring SSID information, the location information service of the smartphone needs to be enabled. Please confirm the settings of the smartphone. ・Is the 2.4GHz/5GHz band SS ID selected in the selection screen of the wireless LAN router? →The communication between the water purifier and the wireless LAN router is only applicable to the 2.4GHz/5GHz frequency band. ・On the connection menu with the water purifier, whether the [Connect to the water purifier] button changes to [Next]. →The smartphone is not connected to the water purifier. Please touch [Connect to water purifier], enter the following SSID and password, and then connect to the water purifier. SSID: Toshiba_ed_xxxx (※ "xxxx" is the fixed SN of the device) Passw ord: 12345678 ・Is the login of the application software completed? →The password entered on the selection menu of the wireless LAN router may be wrong. Please reconfirm the password of the wireless LAN router. ・Is the distance between the wireless LAN router and the water purifier too far. →Please place the wireless LAN router near the water purifier. ・Whether the smartphone is connected to the wireless LAN router? →When logging in the water purifier, the smartphone and the water purifier need to be connected to the same wireless LAN router. * Before conn ecting the water purifier to the wireless LAN, connect your smartphone to the wireless LAN router. * If you have multiple wireless LAN routers in your home, cut off the power of the other wireless LAN routers.
When the user logs in, the confirmation E-mail cannot arrive	• Please confirm E-mail rejection settings, spam folder, and E-mail address.
The displayed content is different from the actual operating conditions.	1. Depending on the communication, server status and smartphone status, the display may be delayed. 2. For Android phones, please make sure to install Google APP first. 3. Check whether the network is normal.
The content after executing the notification setting cannot be sent out	• Is the power of the connected wireless LAN router turned on? • Is there network failure? • Have corresponding settings been made in the "notification setting" of the smartphone and the "notification setting" of the application software? (Corresponding settings must be made)

Under this circumstance

Continued...

Under this circumstance	Check ・Cause
To change login ID To change password	Please operate according to the following steps. 1. Enter "My", click to view and edit your information; 2. Operate according to the screen display.
You can't log out	You cannot log out after a certain period. Please operate according to the following steps. 1. Enter "My" and settings; 2. Click "Logout".
To stop using	Please operate according to the following steps. 1. Enter "My" and select my device. 2. Click on the added device. 3. Click the delete icon“ 🗑 ”in the upper right corner.

Specification of wireless LAN

* Specification: IEEE802.11a/b/g/n
* Frequency: 2.4GHz/5GHz
* Encryption method: WPA™ / WPA2™ * WPS version: Version 2.0

Copyright, etc.

- Android and Google Play are trademarks or registered trademarks of Google Inc.
- iPhone is the trademark of Apple, Inc., registered in the USA and other countries. The iPhone trademark is used with permission from Aiphone Co., Ltd.
- App Store is the service mark of Apple, Inc.
- “WPA™” and “WPA2™” are the registered marks of “Wi-Fi Alliance®”.
- In this Manual, there are some places where ™ and ® marks are not recorded.
- In addition, various names, company names, and product names described in this Manual are trademarks or registered trademarks of the companies respectively.

Consultation about using the operation method or in trouble

Free hotline 1300 88 7899
Service time: Monday to Saturday, 9:00-18:00
Sunday ・ Festivals and Holidays 9:00-17:00
* Except for the closing date specified by our company
* When you call, please confirm the phone number carefully to avoid making a mistake.

- The personal information provided by the customer will be used to provide information such as product repairs, reply to inquiries, and send product catalogs.
- Within the scope of the use purpose, the personal information of the customer may be provided to Toshiba Group or affiliated companies related to the product.

#DetailsMatter

https://www.toshiba-lifestyle.com/my

PANDUAN PENGGUNAAN PERISIAN APLIKASI

PENULEN AIR

TWP-W2529TMY(W)
TWP-W2529TMY(M)



TOSHIBA

KANDUNGAN

Fungsi berikut boleh dicapai---------- 1
Langkah berjaga-jaga keselamatan---------- 1
Artikel yang diperlukan untuk menggunakan perisian aplikasi---------- 1
Keperluan LAN wayarles---------- 2
Dari pemasangan perisian aplikasi hingga sambungan dengan penulen air---------- 3
Antara muka operasi perisian aplikasi---------- 5
Dalam keadaan ini---------- 8
Spesifikasi LAN wayarles---------- 9
Hak Cipta, dsb. ---------- 9
Perundingan tentang menggunakan kaedah operasi atau dalam masalah---------- 9

- Terima kasih banyak kerana membeli Penulen air minuman terus Toshiba.
- Untuk menggunakan produk ini dengan selamat dan betul, sila baca Manual ini dengan teliti sebelum menggunakannya dan fahami kandungannya sepenuhnya.
- Selepas membaca Manual ini, sila simpan di tempat yang boleh dilihat oleh pengguna pada bila-bila masa.
- Menu perisian aplikasi yang digunakan dalam Manual ini boleh berubah tanpa notis.

Fungsi berikut boleh dicapai

● Semak status penulen air dari jauh

- Penggunaan air kumulatif harian, mingguan, bulanan dan tahunan melalui APL.
- Hayat penapis akan tamat tempoh, APL akan mengingatkan anda dengan warna Merah/Kuning.

● Fungsi sokongan pelanggan

- Terima pemberitahuan tolak apabila ralat berlaku.
- Menyediakan soalan lazim, menu dan maklumat lain untuk menggunakan penulen air.

Langkah berjaga-jaga keselamatan

Sila baca dengan teliti

Berikut menerangkan perkara-perkara yang mesti dipatuhi untuk mengelakkan kemudaratan kepada pengguna atau orang lain atau kerosakan harta benda. Apabila diterangkan dalam "Perihalan tanda" ialah klasifikasi tahap bahaya dan kerosakan yang berlaku semasa penyalahgunaan dan operasi, dan "Perihalan simbol grafik" ialah makna bagi simbol yang berbeza.

Perihalan tanda

⚠ **AMARAN** Ia bermaksud "kandungan dengan kemungkinan kematian atau kecederaan serius".

* Kecederaan teruk merujuk kepada kecederaan yang menyebabkan sekuela, memerlukan penjagaan hospital dan rawatan berurutan jangka panjang, termasuk menjadi buta, cedera, melecur (suhu tinggi dan suhu rendah), terkena kejutan elektrik, patah tulang dan keracunan, dsb.

Perihalan simbol grafik

⃠ Teks berhampiran grafik menunjukkan operasi yang tidak boleh dilakukan (dilarang).

● Teks berhampiran grafik menunjukkan operasi (arahan) yang mesti dilakukan.

⚠ AMARAN

❗ Arahan	Sila kekalkan jarak melebihi 15 cm daripada individu yang mempunyai implan alat perentak jantung atau defibrilator. Gelombang radio yang dihasilkan oleh LAN wayarles mungkin mempunyai pengaruh buruk pada alat perentak jantung. dsb. dan menyebabkan kemalangan.
⃠ Dilarang	Jangan gunakannya berdekatan dengan peralatan kawalan automatik seperti pintu automatik dan penggera kebakaran. Jangan gunakannya di hospital atau tempat yang mempunyai peralatan elektrik untuk kegunaan perubatan. Gelombang radio yang dihasilkan oleh LAN wayarles mungkin mempunyai pengaruh buruk pada peralatan dan menyebabkan kemalangan.

Artikel yang diperlukan untuk menggunakan perisian aplikasi

- ☐ Telefon pintar (Android, iPhone)... ia tidak dapat menjamin bahawa produk boleh berfungsi dengan baik jika komputer tablet diguna pakai.
- ☐ Perisian aplikasi khusus (percuma). Ia adalah perlu untuk memeriksa penulen air dengan telefon pintar. Kaedah pemasangan (→ Halaman 3)
- ☐ Persekitaran Internet... Perlu menandatangani kontrak dengan pembekal talian Internet.
- ☐ Penghala LAN wayarles... Sambungkan penulen air ke talian Internet.
  * Sambungan dengan penulen air menggunakan jalur frekuensi 2.4Ghz/5Ghz (IEEE802.11 a, IEEE802.11 b, IEEE802.11 g, IEEE802.11 n).


【Keperluan】
- Untuk mencapai langkah-langkah keselamatan, pastikan anda menggunakan peranti yang menggunakan kaedah penyulitan yang sesuai WPA2 atau WPA (kedua-dua TKIP atau AES). Syor: WPA2 (AES)
- Untuk tetapan penghala LAN wayarles, sila rujuk kepada Arahan Operasi.

Keperluan LAN wayarles

- Jalur frekuensi kerja

  LAN wayarles menggunakan jalur frekuensi 2.4Ghz/5Ghz, tetapi ada kemungkinan peranti wayarles lain juga menggunakan frekuensi yang sama. Untuk mengelakkan gangguan gelombang radio dengan peranti wayarles lain, sila ambil perhatian perkara berikut semasa menggunakannya.

- Spesifikasi wayarles yang digunakan oleh produk ini

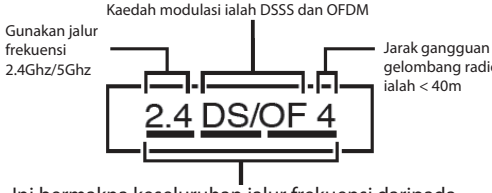

Ini bermakna keseluruhan jalur frekuensi daripada 2.4GHz hingga 2.4835GHz dan 5.15GHz hingga 5.825GHz boleh digunakan, dan penggunaan jalur frekuensi peranti pengenalpastian mudah alih boleh dielakkan.

Langkah berjaga-jaga untuk penggunaan peranti LAN wayarles

Dalam jalur frekuensi yang digunakan oleh peralatan ini, selain peralatan industri, saintifik dan perubatan seperti ketuhar gelombang mikro, terdapat juga stesen radio di kawasan tersebut untuk mengenal pasti objek bergerak yang digunakan dalam barisan pengeluaran kilang (stesen radio berlesen) dan stesen radio berkuasa rendah tertentu (stesen radio yang tidak memerlukan lesen) dan stesen radio amatur (stesen radio memerlukan lesen) juga digunakan.

1. Sebelum menggunakan peranti ini, sila pastikan bahawa tiada stesen radio di kawasan untuk mengenal pasti objek bergerak, stesen radio berkuasa rendah tertentu dan stesen radio wayarles sedang digunakan berhampiran aksesori.
2. Sekiranya gangguan gelombang radio berbahaya berlaku dari stesen radio di kawasan di mana peranti ini digunakan untuk mengenal pasti objek bergerak, sila tukar tempat tersebut dengan segera atau berhenti menggunakan gelombang radio.
3. Selain itu, jika peralatan ini menyebabkan gangguan gelombang radio berbahaya kepada stesen radio berkuasa rendah tertentu atau stesen radio amatur yang digunakan untuk pengenalpastian mudah alih, sila tukar peralatan dengan segera atau berhenti menggunakan radio.

- Pensijilan peralatan

  Peralatan ini mempunyai peranti wayarles terbina dalam yang telah memperoleh pensijilan reka bentuk kejuruteraan berdasarkan undang-undang radio, dan tidak perlu mendapatkan lesen stesen radio berasingan. Bagaimanapun, tindakan berikut adalah dilarang di bawah akta radio.

  - Laksanakan penguraian/pembentukan semula.
  - Hilangkan tanda pematuhan peranti wayarles terbina dalam.

- Hayat perkhidmatan

  Sila ambil perhatian tentang sekatan berikut semasa penggunaan.

  Syarikat kami tidak akan bertanggungjawab untuk sebarang kerosakan sampingan yang disebabkan oleh penggunaan atau ketidakupayaan LAN wayarles sekiranya berlaku ketidakpatuhan terhadap sekatan.

  - Jangan sambung ke rangkaian wayarles tanpa kebenaran.

    Apabila carian automatik bagi persekitaran rangkaian wayarles dilakukan, rangkaian wayarles (SSID ※) yang tidak mempunyai hak akses mungkin dipaparkan, dan ia mungkin ditentukan sebagai akses haram selepas sambungan.
  - Tolong jangan gunakannya di tempat yang menjana medan magnet, elektrik statik atau gangguan gelombang radio.

  Apabila digunakan berhampiran peralatan berikut, komunikasi mungkin terganggu atau kelajuan mungkin menjadi perlahan.

  - Ketuhar gelombang mikro
  - Peranti LAN wayarles lain
  - Peranti lain yang menggunakan gelombang radio jalur frekuensi 2.4Ghz/5Ghz (telefon tanpa wayar digital, peralatan audio wayarles, konsol permainan, peranti komputer peribadi, dsb.)
  - Objek logam yang mudah memantulkan gelombang radio, dsb.

  ※ Ia adalah nama yang digunakan untuk mengenal pasti rangkaian tertentu dalam LAN wayarles. Dua peranti boleh berkomunikasi jika SSID adalah sama.

  【Mengenai SSID mesin ini】

  - **SSID: toshiba_ed_xxxx**
  - **KATA LALUAN: 12345678**

  ※ "xxxx" ialah nombor siri tetap peralatan.

- Langkah-langkah keselamatan

  - Memandangkan data dihantar dan diterima menggunakan gelombang radio melalui LAN wayarles, terdapat risiko akses yang tidak dibenarkan. Untuk memastikan keselamatan data, sila ambil langkah-langkah keselamatan. (→ Halaman 1)

    Jika kegagalan untuk mengambil langkah keselamatan menyebabkan sebarang masalah, syarikat kami tidak akan bertanggungjawab.
  - Sila tetapkan kata laluan penghala LAN wayarles kepada 8 aksara atau lebih dan 63 aksara atau kurang, dan disyorkan untuk menukar kata laluan dengan kerap.

- Mengenai perisian tegar

  - Peralatan ini mempunyai fungsi menyambung ke pelayan kemas kini perisian tegar syarikat kami melalui Internet dan mengemas kini perisian tegarnya secara automatik kepada versi terkini. Memandangkan komunikasi tanpa wayar akan terganggu buat sementara waktu semasa proses kemas kini, gangguan atau kelembapan komunikasi mungkin berlaku.
  - Tolong jangan menganalisis atau mengubah suai perisian tegar.


Dari pemasangan perisian aplikasi hingga sambungan dengan penulen air

1. Muat turun dan pasang apl. Cari: TSmartLife dalam pasaran aplikasi mudah alih, atau imbas kod QR untuk memuat turun dan memasang APL.


TSmartLife

Download the app & activate product

2. Klik pada ikon APL untuk masuk APL.




3.Baca dan bersetuju dengan **Dasar Privasi dan Lesen Perisian dan Perjanjian Perkhidmatan Pengguna.**




4. Klik butang **Log masuk.**




5. Klik butang **Daftar >.**



6.Masukkan e-mel dan **hantar kod pengesahan.**




7. Pilih kawasan perkhidmatan dan masukkan kod pengesahan. Bersetuju dengan Dasar Privasi **dan Lesen Perisian dan Perjanjian Perkhidmatan Pengguna.** Klik butang **Seterusnya.**




8.Tetapkan kata laluan.Kemudian klik butang **Daftar dan log masuk.**




9.Masuk halaman utama. Klil butang **Tambah peranti.**




10.Pilih peranti.Pilih **Peranti dispenser dan penulen air.**



11. Pilih model **TWP-W2529TMY(W) TWP-W2529TMY(M).**




12.Pilih antara muka Sambungan Wayarles, masukkan kata laluan Sambungan Wayarles. Klik butang **Seterusnya.**




13. Jika anda tidak membenarkan lokasi sebelum ini, sila benarkan akses dalam tetapan kemudian hidupkan lokasi yang tepat. Klik butang Pergi ke tetapan.




14.Masuk halaman **Tetapan** .Klik butang **Lokasi.**




15.Pilih **Semasa Menggunakan Apl.**



16.Kembali ke **TSmartLife**. Klik butang **Seterusnya.**




17. Tekan lama  selama 3 saat, cahaya berkelip.



18.Tunggu untuk menyambung.



19. Berjaya ditambahkan namakannya mengikut kehendak anda. Kemudian klik butang **Selesai.** 	20.Kembali ke laman utama. 

Langkah berjaga-jaga dan penyelesaian masalah atas sebab kegagalan rangkaian.

1. Apabila menyambungkan produk ke rangkaian, pastikan telefon bimbit berada sedekat mungkin dengan produk.
2. Menurut gesaan Apl, jika produk anda hanya menyokong komunikasi rangkaian Wayarles 2.4GHz, apabila memilih rangkaian Wayarles rumah semasa, sila beri perhatian untuk memilih rangkaian 2.4GHz.
3. Nama rangkaian wayarles penghala tidak disyorkan untuk mengandungi aksara Cina atau khas (termasuk tanda baca, ruang, dsb.).
4. Adalah disyorkan agar bilangan peranti yang disambungkan di bawah penghala yang sama tidak melebihi 10 untuk mengelakkan pengaruh isyarat tidak stabil pada rangkaian.
5. Jika penghala atau nama rangkaian wayarles dan kata laluan ditukar, anda perlu mengulangi proses di atas untuk menyambung semula ke Internet.
6. Apabila teknologi produk dikemas kini, kandungan Apl Toshiba mungkin ditukar dan panduan paparan sebenar dalam TSmartLife akan diguna pakai.

Antara muka operasi perisian aplikasi

1. Masuk ke halaman utama antara muka kawalan APP, paparan adalah seperti berikut:



2. Hasil air

Pada halaman utama APL, klik pada kuantiti air, terdapat tiga gerai untuk dipilih, klik pada mana-mana gerai, anda boleh memilih jumlah air yang sepadan untuk menetapkan pengambilan air.




3. Pemilihan suhu

Pada halaman utama aplikasi, klik pilihan suhu air untuk menetapkan suhu air, anda boleh menetapkan suhu air panas, klik air panas 1 hingga 3, terdapat pilihan suhu air panas yang sepadan.



4. Penetapan masa pensterilan


Pada halaman utama APL, klik Tetapan Pensterilan, anda boleh memilih suhu dan kuantiti air yang berbeza, anda boleh menyediakan sehingga 5 item.

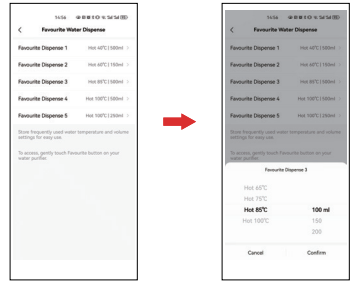

5. Pada antara muka halaman utama APL, klik ikon elemen penapis yang sepadan untuk memasuki antara muka paparan hayat elemen penapis yang sepadan:



6. Laman utama antara muka kawalan APL, klik butang " ... ", masukkan antara muka paparan fungsi lain:



Dalam keadaan ini

Bersambung...

Dalam keadaan ini	Semak • Sebab
Jika sambungan gagal, sila ikuti langkah di sebelah kanan untuk menyemak.	Penulen air belum mewujudkan sambungan dengan penghala LAN wayarles. • Adakah SSID penghala LAN wayarles dipaparkan pada menu pemilihan penghala LAN wayarles. → Sebelum melakukan operasi sambungan dengan penulen air, sila sambungkan telefon pintar ke penghala LAN wayarles.. Selain itu, apabila memperoleh maklumat SSID, perkhidmatan maklumat lokasi telefon pintar perlu didayakan. Sila sahkan tetapan telefon pintar. • Adakah SSID jalur 2.4GHz/5GHz dipilih dalam skrin pemilihan penghala LAN wayarles? → Komunikasi antara penulen air dan penghala LAN wayarles hanya terpakai pada jalur frekuensi 2.4GHz/5GHz.. • Pada menu sambungan dengan penulen air, sama ada butang [Sambung ke penulen air] bertukar kepada [Seterusnya]. → Telefon pintar tidak disambungkan kepada penulen air. Sila sentuh [Sambung ke penulen air], masukkan SSID dan kata laluan berikut, dan kemudian sambungkan kepada penulen air. SSID: Toshiba_ed_xxxx (※ "xxxx" adalah SN tetap peranti) Kata laluan: 12345678 • Adakah log masuk perisian aplikasi selesai? → Kata laluan yang dimasukkan pada menu pemilihan penghala LAN wayarles mungkin salah. Sila sahkan semula kata laluan penghala LAN wayarles. • Adakah jarak antara penghala LAN wayarles dan penulen air terlalu jauh. → Sila letakkan penghala LAN wayarles berhampiran penulen air. • Adakah telefon pintar disambungkan ke penghala LAN wayarles? → Apabila log masuk penulen air, telefon pintar dan penulen air perlu disambungkan ke penghala LAN wayarles yang sama. * Sebelum menyambungkan penulen air ke LAN wayarles, sambungkan telefon pintar anda ke penghala LAN wayarles. * Jika anda mempunyai berbilang penghala LAN wayarles di rumah anda, matikan kuasa penghala LAN wayarles yang lain.
Apabila pengguna log masuk, e-mel pengesahan tidak boleh sampai	• Sila sahkan tetapan penolakan E-mel, folder spam dan alamat e-mel.
Kandungan yang dipaparkan adalah berbeza daripada keadaan operasi sebenar.	1. Bergantung pada komunikasi, status pelayan dan status telefon pintar, paparan mungkin tertunda. 2. Untuk telefon Android, sila pastikan anda memasang APL Google terlebih dahulu. 3. Semak sama ada rangkaian adalah normal.
Kandungan selepas melaksanakan tetapan pemberitahuan tidak boleh dihantar keluar	• Adakah kuasa penghala LAN wayarles yang disambungkan dihidupkan? • Adakah terdapat kegagalan rangkaian? • Adakah tetapan yang sepadan telah dibuat dalam "tetapan pemberitahuan" telefon pintar dan "tetapan pemberitahuan" perisian aplikasi? (Tetapan yang sepadan mesti dibuat)

Dalam keadaan ini

Bersambung...

Dalam keadaan ini	Semak • Sebab
Untuk menukar ID log masuk Untuk menukar kata laluan	Sila kendalikan mengikut langkah berikut. 1. Masukkan "Saya", klik untuk melihat dan mengedit maklumat anda; 2. Beroperasi mengikut paparan skrin.
Anda tidak boleh log keluar	Anda tidak boleh log keluar selepas tempoh tertentu. Sila kendalikan mengikut langkah berikut. 1. Masukkan "Saya" dan tetapan; 2. Klik "Log Keluar".
Untuk berhenti menggunakan	Sila kendalikan mengikut langkah berikut. 1. Masukkan "Saya" dan pilih peranti saya. 2. Klik pada peranti yang ditambahkan. 3. Klik ikon padam" "di penjuru kanan sebelah atas.

Spesifikasi LAN wayarles

* Spesifikasi: IEEE802.1 1a/b/g/n
* Frekuensi: 2.4GHz/5GHz
* Kaedah penyulitan: WPA™ / WPA2™ * Versi WPS: Versi 2.0

Hak Cipta, dsb.

- Android dan Google Play ialah tanda dagangan atau tanda dagangan berdaftar Google Inc.
- iPhone ialah tanda dagangan Apple, Inc., yang didaftarkan di AS dan negara lain. Tanda dagangan iPhone digunakan dengan kebenaran daripada Aiphone Co., Ltd.
- App Store ialah tanda perkhidmatan Apple, Inc.
- "WpA™" dan "WPA2™" ialah tanda berdaftar "Wi-Fi Alliance®".
- Dalam Manual ini, terdapat beberapa tempat di mana tanda ™ dan ® tidak direkodkan.
- Selain itu, pelbagai nama, nama syarikat dan nama produk yang diterangkan dalam Manual ini adalah tanda dagangan atau tanda dagangan berdaftar syarikat masing-masing.

Perundingan tentang menggunakan kaedah operasi atau dalam masalah

Talian penting percuma 1300 88 7899
Masa perkhidmatan: Isnin hingga Sabtu, 9:00-18:00
Ahad · Perayaan dan Cuti 9:00-17:00
* Kecuali tarikh tutup yang ditentukan oleh syarikat kami
* Apabila anda membuat panggilan, sila sahkan nombor telefon dengan teliti untuk mengelakkan kesilapan.

- Maklumat peribadi yang diberikan oleh pelanggan akan digunakan untuk memberikan maklumat seperti pembaikan produk, membalas pertanyaan dan menghantar katalog produk.
- Dalam skop tujuan penggunaan, maklumat peribadi pelanggan mungkin diberikan kepada Kumpulan Toshiba atau syarikat gabungan yang berkaitan dengan produk.

#DetailsMatter

https://www.toshiba-lifestyle.com/my